PRODUCT CODE: 1611	SWING FOR PEOPLE WITH DISABILITIES	SWINGS



DEVICE DATA

Easily accessible device

Compliance with the PN-EN standard: 1176-1:2024-03

Number of users : 2

Age group : +1

Width : 2.08 m

Length : 3.07 m


Height : 2.65 m


Minimum space required : 8.54 mx 4.47 m

Fall area : 31.50 m²

Foundation depth : -0.60 m

PROJECTION AND VIEW OF THE DEVICE

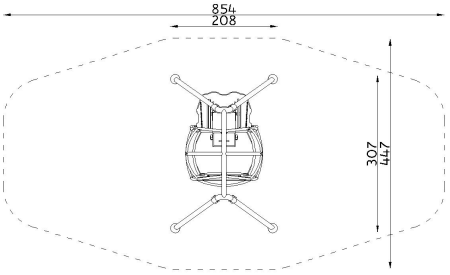

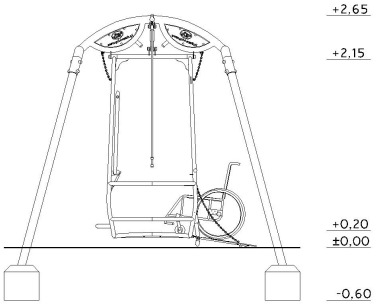

COMPONENTS

Swing construction : 1 set

TECHNOLOGY

Structural legs: square steel profiles, cross-section 70x70mm, hot-dip galvanized and powder coated

Steel elements: galvanized steel, powder coated

Platform : corrugated aluminum sheet

Chain : galvanized steel

Ropes : polypropylene with steel braiding, finished with a rubber handle

Shock absorbers : pneumatic

Caps: system caps made of plastic, dimensions adapted to the mounting screws used

Foundations: wet poured foundation footings , made of concrete class C12/15 or better

Due to continuous improvement of technical solutions, the presented drawings, including colors and dimensions, may differ slightly from the currently manufactured devices.

NOLMO Sp. z o. o. reserves all rights to copyright protection under the Act of 04.02.1994 on Copyright and Related Rights (Journal of Laws No. 28 item 83), in particular Articles 78 and 79 of that Act.