PRODUCT CODE: 10031-10019FM-GR-1	COMBINED SWING	SWINGS



DEVICE DATA

PROJECTION AND VIEW OF THE DEVICE

Easily accessible device

Compliance with the PN-EN standard: 1176-1:2024-03

Number of users : 4

Age group : +1

Width : 6.50 m

Length : 1.92 m


Height : 2.40 m


Minimum space required : 6.50 x 7.40 m

Free fall height : 1.25 m

Fall area : 48.10 m²

Foundation depth : -0.60m

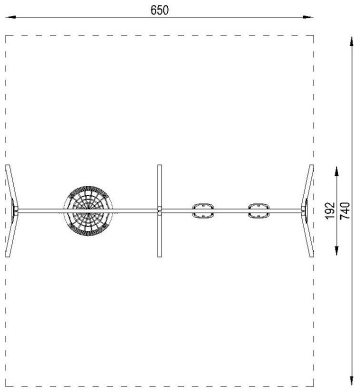

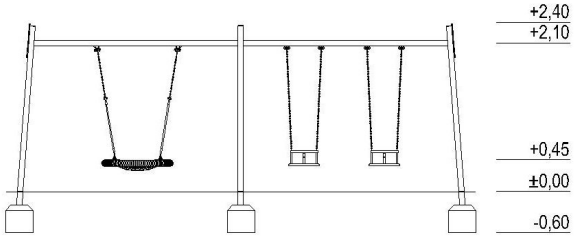

COMPONENTS

Supporting structure : 1 set

Seat nest : 1 pc.

Basket seat : 2 pcs.

TECHNOLOGY

Structural columns: square steel profiles, cross-section 70x70mm, hot-dip galvanized and powder coated

Horizontal beam: square steel profile, cross-section 70x70mm, mounting plate girders 4mm thick, all hot-dip galvanized, powder coated

Basket seat: metal supporting structure, coated with soft black plastic

Stork's nest seat: made of braided polypropylene ropes, attached to a metal ring, protected with a shock-absorbing layer and wrapped with polypropylene rope

Chain: 6mm calibrated chain, stainless steel

Decorative applications: HDPE board, 15mm thick, dyed throughout

Slings: steel, galvanized, mounted on plastic sliding bushings

End caps: plastic

Foundations: concrete class at least C12/15

Due to continuous improvement of technical solutions, the presented drawings, including colors and dimensions, may differ slightly from the currently manufactured devices.

NOLMO Sp. z o. o. reserves all rights to copyright protection under the Act of 04.02.1994 on Copyright and Related Rights (Journal of Laws No. 28 item 83), in particular Articles 78 and 79 of that Act.