PRODUCT CODE: 10031_2000	COMBINED SWING	SWINGS



DEVICE DATA

Easily accessible device

Compliance with the PN-EN standard: 1176-1:2024-03

Number of users : 4

Age group : +1

Width : 6.50 m

Length : 1.92 m

Height : 2.40 m


Minimum space required : 6.50 x 7.40 m


Free fall height : 1.25 m

Fall area : 48.10 m²

Foundation depth : -0.60 m

PROJECTION AND VIEW OF THE DEVICE

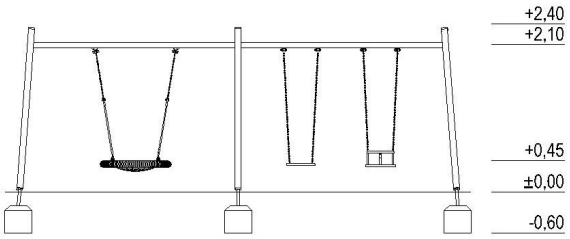

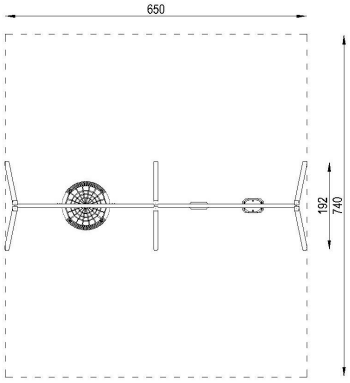

COMPONENTS

Supporting structure : 1 set

Seat nest : 1 pc.

Basket seat : 1 pc.

Slatted seat: 1 pc.

TECHNOLOGY

Structural columns: pine wood, glue laminated , cross-section 90x90mm, impregnated and painted with acrylic glaze in dark walnut color

Horizontal beam: square steel profile, cross-section 70x70mm, mounting plate girders 4mm thick, all hot-dip galvanized, powder coated

Anchors: galvanized steel

Basket seat: metal supporting structure, coated with soft black plastic

Slatted seat: metal supporting structure, coated with soft black plastic

Stork's nest seat: made of braided polypropylene ropes, attached to a metal ring, protected with a shock-absorbing layer and wrapped with polypropylene rope

Chain: 6mm calibrated chain, stainless steel

Slings: steel, galvanized, mounted on plastic sliding bushings

End caps: plastic

Foundations: concrete class at least C12/15

Due to continuous improvement of technical solutions, the presented drawings, including colors and dimensions, may differ slightly from the currently manufactured devices.

NOLMO Sp. z o. o. reserves all rights to copyright protection under the Act of 04.02.1994 on Copyright and Related Rights (Journal of Laws No. 28 item 83), in particular Articles 78 and 79 of that Act.